



ENGINEERING, TESTING & INSPECTION

P.O. BOX 15732 • TAMPA, FLORIDA 33684 • 813/872-7821 CA No. 1450

PROJECT: Product Check

CLIENT: Pasco Mine

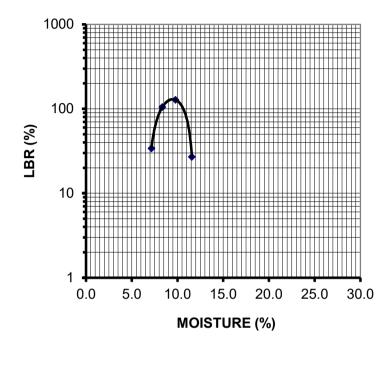

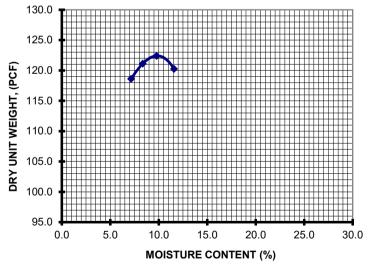

LIMEROCK BEARING RATIO TEST

TEST METHOD: FDOT FM 5-515

PROJECT NO:	1505.21.1
DATE:	July 7, 2025
LAB NO:	B-15425
LBR TEST NO:	29
COMPACTION TEST NO.:	49
MAXIMUM LBR VALUE (%):	128
MAXIMUM DRY DENSITY (PCF):	122.4
OPTIMUM MOISTURE (%):	9.7
DATE RECEIVED:	06/20/25
DATE TESTED:	07/05/25
TESTED BY:	MD

LOCATION SAMPLED: Stockpile

SOIL DESCRIPTION: Crushed Limerock

TYPE OF MATERIAL: Base

SOAKING TIME (HRS):	48±4
SOAKING SURCHARGE (LBS):	2.5
TESTING SURCHARGE (LBS):	0

REMARKS:

SHANNON R. SNYDER, P.E.

Florida License No. 57019

This report contains information that is intended solely for the use of the client and noted assigns. This report shall not be reproduced, except in full, without written approval of Test Lab, Inc.