

PROJECT: Product Check

CLIENT: Pasco Mine


LIMEROCK BEARING RATIO TEST

TEST METHOD: FDOT FM 5-515

PROJECT NO: 1505.21.1

DATE: July 7, 2025

LAB NO: B-15426

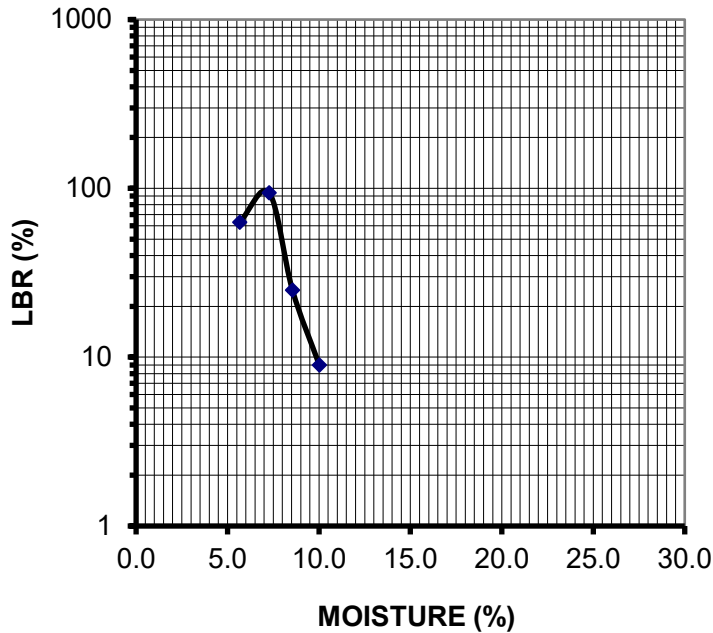

LBR TEST NO: 30

COMPACTION TEST NO.: 50

MAXIMUM LBR VALUE (%): 94

MAXIMUM DRY DENSITY (PCF): 129.0

OPTIMUM MOISTURE (%): 7.0


DATE RECEIVED: 06/20/25

DATE TESTED: 07/05/25

TESTED BY: MD

LOCATION SAMPLED: Stockpile

SOIL DESCRIPTION: Clayey Crushed Limerock

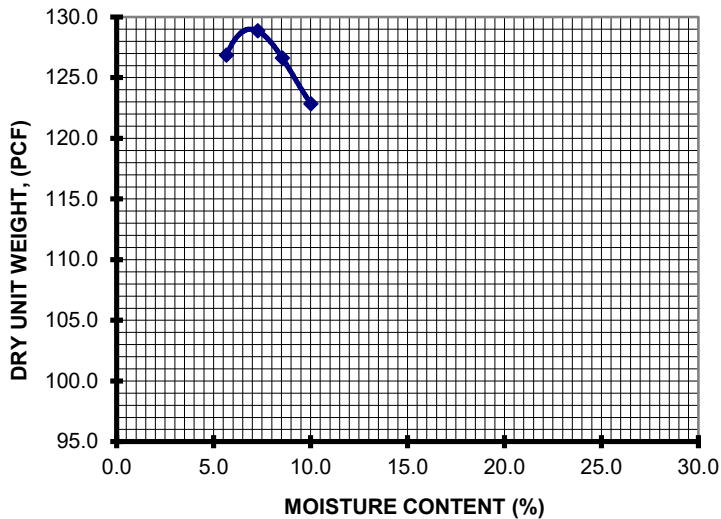

TYPE OF MATERIAL: Stabilizer

SOAKING TIME (HRS): 48±4

SOAKING SURCHARGE (LBS): 2.5

TESTING SURCHARGE (LBS): 15

REMARKS:

SHANNON R. SNYDER, P.E.

Florida License No. 57019

This report contains information that is intended solely for the use of the client and noted assigns.

This report shall not be reproduced, except in full, without written approval of Test Lab, Inc.